

KWO® CellFlon® Sheet White – sPTFE gasket sheet



KWO® CellFlon® Sheet White is a gasket sheet material containing structured PTFE and Barium Sulphate.

The product is especially for use in the chemical and petrochemical industry. Suitable for sealing most chemicals across the whole pH range (0-14), including strong acids, hydrocarbons, steam, solvents and others.

The printed sheets, which are intended for industrial use, enable clear traceability of the gasket. For ultra-clean applications such as especially in the food and pharmaceutical sector, we also offer the sheets in neutral – without ink.



★ Advantages

- > universal purpose applications
- > excellent sealability
- > reduced cold flow
- > easy to install and remove without residue

⚙ Properties

- > high chemical resistance
- > UV resistant, non-ageing, unlimited storable
- > non-flammable

📐 Applications

- > flange connections
- > closing lids
- > reactors
- > process vessels

🏆 Certificates

- > TA Luft regulation and blow out safety acc. to VDI 2200
- > FDA 21 CFR 177.1550 tested*
- > specific values according to DIN EN 13555

* The certification does not apply to printed CellFlon® sheets.

TECHNICAL DATA

Material	structured PTFE with Barium Sulphate
Chemical resistance	in the entire pH range (pH 0-14, except molten alkali metals or elemental fluorine)
Temperature range	recommended temperature range: from -210°C (-346°F) to +260°C (+500°F), material heat resistant up to +315°C (+600°F)*
Pressure range	vacuum up to 80bar (1200psi) depending on the installation situation*
Physiologically inert	physiologically harmless in all recommended applications
Density	2,80 g/cm³ +/- 0,25 g/cm³

* **Note:** temperature and pressure guides cannot necessarily be used simultaneously.


Quality assurance

The KWO® Quality Management is certified by TÜV Süd according to DIN EN ISO 9001.
 Our suppliers are also integrated in this quality system.

Available Dimension

Length x Width [mm]	Thickness [mm]*		
	1,5mm	2,0mm	3,0mm
1500 x 1500	X	X	X

*Other dimensions available on request.

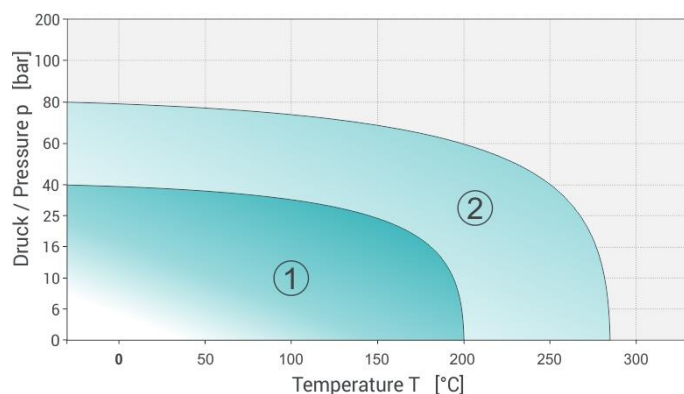


To order, please use the following text

KWO® CellFlon® Sheet White, 1500x1500x _mm, Pieces
 (Length) (Width) (Thickness)


The p-T diagram indicates the service limits considering the simultaneous influence of pressure and temperature.

Range 1: Typical service limits
 Range 2: Maximum application limits, after technical verification

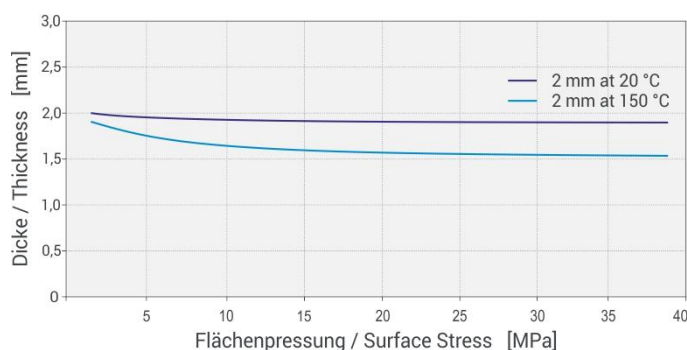

Values

Leakage	<0.005 mg*s-1*m-1	DIN 3535-6
Creep	<28%	DIN 3535-6
Compression	>4.3%	DIN 3535-6
Recovery	>2.1%	DIN 3535-6

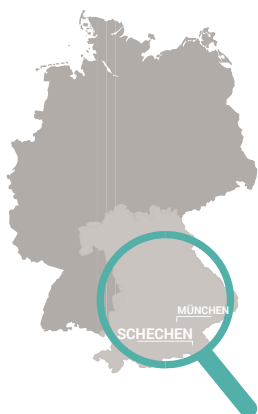

- ✓ Made in Germany
- ✓ International Presence
- ✓ Represented in over 50 countries

For detailed selection criteria, technical information, installation guideline and the relevant contact person, please visit our website: www.kwo-ptfe.de

KWO® Dichtungstechnik GmbH

Am Eschengrund 3
 83135 Schechen, Germany
 Tel: + 49 8039 90254-0
 Fax: + 49 8039 90254-299
 Email: info@kwo-ptfe.de



All technical information and advice given here is based on our previous experiences and/or test results. We give this information to the best of our knowledge, but assume no legal responsibility. Customers are asked to check the suitability and usability in the specific application, since the performance of the product can only be judged when all necessary operating data are available. Specifications are subject to change without notice. KWO's terms and conditions of sale apply to the purchase and sale of the product.