

## KWO® MultiTex® Sheet HD – ePTFE gasket sheet



KWO® MultiTex® Sheet HD is produced from 100% multidirectional expanded PTFE with a high density and without any pigments or adhesives.

The flexible material adapts well to sealing surfaces, compensates irregularities and seals at very low stress. Suitable for use in metallic flanged, as well as stress sensitive connections.

In addition to the printed sheets, which are intended for industrial use and enable clear traceability, we are also offering embossed sheets without ink, which are particularly suitable for ultra-clean applications such as in the food and pharmaceutical sector.



### ★ Advantages

- > high diffusion sealing
- > adapts well to sealing surfaces
- > compensates irregularities
- > superior resistance to creep and cold flow
- > very high sealability especially at very low stresses

### ⚙ Properties

- > high chemical resistance
- > UV resistant, non-ageing, unlimited storable
- > nontoxic, biologically inert
- > non-flammable

### 📄 Applications

- > flange connections, tank sealings
- > heat exchangers, apparatus constructions
- > glass-lined flanges, reactors
- > pumps

### 🏆 Certificates

- > BAM - suitable for use with fluid and gaseous oxygen
- > TA Luft regulation and blow out safety acc. to VDI 2200
- > specific values according to DIN EN 13555
- > FDA 21 CFR 177.1550 tested\*
- > EC1935/2004 - suitable for applications with food contact\*
- > USP Plastic Class for pharmaceutical applications\*

\* These certificates do not apply to printed MultiTex® HD sheets.

## TECHNICAL DATA

<b>Material</b>	100% multidirectional expanded PTFE (ePTFE)
<b>Chemical resistance</b>	in the entire pH range (pH 0-14, except molten alkali metals and elemental fluorine)
<b>Temperature range</b>	-268°C (-450°F) up to +270°C (+518°F), short-term +315°C (+600°F) recommended temperature range: from -160°C (-256°F) to +230°C (+446°F)*
<b>Pressure range</b>	vacuum up to 200bar (3000psi) depending on the installation situation*
<b>Physiologically inert</b>	physiologically harmless in all recommended applications
<b>Density</b>	1,15 g/cm <sup>3</sup> +/-0,10g/cm <sup>3</sup>

\*Note: temperature and pressure guides cannot necessarily be used simultaneously.


**Quality assurance**

The KWO® Quality Management is certified according to DIN EN ISO 9001. Our suppliers are also integrated in this quality system. We use exclusively high quality raw materials in the fabrication of our products, which provide the highest level of safety and reliability.



Teflon™ is a trademark of The Chemours Company FC, LLC used under license by KWO® Dichtungstechnik GmbH.


**Available Dimensions**

Length x Width [mm]	Thickness [mm]*			
1524 x 1524	1,0	1,5	2	3

\*Other dimensions available on request.

To order please use the following text:

KWO® MultiTex® HD Sheet, 1524x1524x \_\_ mm, pieces  
 (Length) (Width) (Thickness)


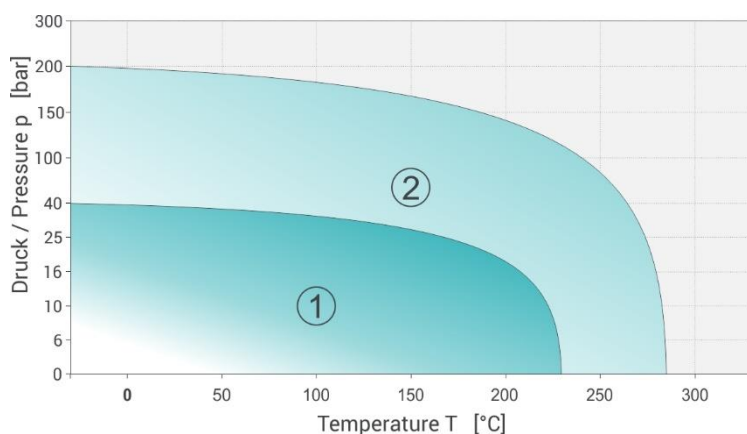


The p-T diagram indicates the service limits considering the simultaneous influence of pressure and temperature.

Range 1: Typical service limits  
 Range 2: Maximum application limits, after technical verification

**Values**

<b>Q<sub>MIN</sub> (0,01)</b>	28 MPa	DIN EN 13555
<b>Q<sub>S</sub> MIN (0,01)</b>	<<10 MPa	DIN EN 13555
<b>PQR<sub>(30 MPa 20°C)</sub></b>	0,94	DIN EN 13555
<b>PQR<sub>(30 MPa 150°C)</sub></b>	0,67	DIN EN 13555
<b>maintenance factor m</b>	2,5	ASTM
<b>seating stress y</b>	2800 psi	ASTM

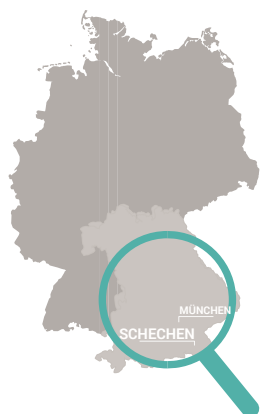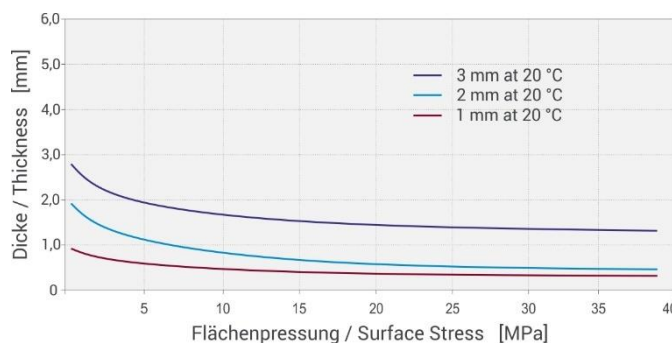

- ✓ Made in Germany
- ✓ International Presence
- ✓ Represented in over 50 countries

For detailed selection criteria, technical information, installation guideline and the relevant contact person, please visit our website: [www.kwo-ptfe.de](http://www.kwo-ptfe.de)

**KWO® Dichtungstechnik GmbH**

Am Eschengrund 3  
 83135 Schechen, Germany  
 Tel: + 49 8039 90254-0  
 Fax: + 49 8039 90254-299  
 Email: [info@kwo-ptfe.de](mailto:info@kwo-ptfe.de)



All technical information and advice given here is based on our previous experiences and/or test results. We give this information to the best of our knowledge, but assume no legal responsibility. Customers are asked to check the suitability and usability in the specific application, since the performance of the product can only be judged when all necessary operating data are available. Specifications are subject to change without notice. KWO's terms and conditions of sale apply to the purchase and sale of the product.