


KWO® MultiTex® Sheet 2.0 – ePTFE gasket sheet



KWO® MultiTex® Sheet 2.0 is produced from 100% multi-directional expanded PTFE without any pigments or adhesives.

The flexible material adapts well to sealing surfaces, compensates irregularities and seals at very low stress. It is suitable for use in steel flanges and glass-lined steel flanges, as well as stress sensitive connections.

In addition to the printed sheets, which are intended for industrial use and enable clear traceability, we are also offering embossed sheets without ink, which are particularly suitable for ultra-clean applications such as in the food and pharmaceutical sector.

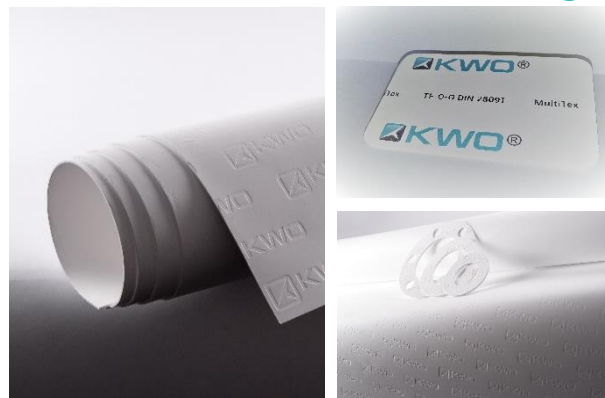

★ Advantages

- > adapts well to sealing surfaces
- > compensates irregularities
- > superior resistance to creep and cold flow
- > very high sealability especially at very low stresses

⚙️ Properties

- > high chemical resistance
- > UV resistant, non-ageing, unlimited storable
- > nontoxic, biologically inert
- > non-flammable

📦 Applications

- > flange connections, tank sealings
- > heat exchangers
- > apparatus constructions
- > glass-lined flanges
- > reactors
- > pumps

🏆 Certificates

- > BAM - suitable for use with fluid and gaseous oxygen
- > TA Luft regulation and blow out safety acc. to VDI 2200
- > specific values according to DIN EN 13555
- > FDA 21 CFR 177.1550 tested*
- > EC1935/2004 - suitable for applications with food contact*
- > USP Class VI for pharmaceutical applications*

* These certificates do not apply to printed MultiTex® sheets.

TECHNICAL DATA

Material	100% multi-directional expanded PTFE (ePTFE)
Chemical resistance	in the entire pH range (pH 0-14, except molten alkali metals and elemental fluorine)
Temperature range	-268°C (-450°F) up to +270°C (+518°F), short-term +315°C (+600°F) recommended temperature range: from -160°C (-256°F) to +230°C (+446°F)*
Pressure range	vacuum up to 200bar (3000psi) depending on the installation situation*
Physiologically inert	physiologically harmless in all recommended applications
Density	0,75 g/cm³ +/- 0,15 g/cm³

*Note: temperature and pressure guides cannot necessarily be used simultaneously.


Quality assurance

The KWO® Quality Management is certified by TÜV Süd according to DIN EN ISO 9001. Our suppliers are also integrated in this quality system. We use exclusively high quality raw materials in the fabrication of our products, which provide the highest level of safety and reliability.



Teflon™ is a trademark of The Chemours Company FC, LLC used under license by KWO® Dichtungstechnik GmbH.

Available Dimensions

Length x Width [mm]	Thickness [mm]*									
	0,25	0,5	1,0	1,5	2	3	4	5	6	7
1524 x 1524	0,25	0,5	1,0	1,5	2	3	4	5	6	7
1450 x 1450	8	9	10	11						

*Other dimensions available on request.



To order, please use the following text

KWO® MultiTex® Sheet 2.0, ___x___x___ mm, pieces
 (Length) (Width) (Thickness)

Values

	1,5mm	2mm	3mm	6mm
Q_{MIN} (0,01) (10bar)	19 MPa	21 MPa	21 MPa	25 MPa
Q_{MIN} (0,01) (20bar)	23 MPa	26 MPa	27 MPa	30 MPa
Q_{MIN} (0,01) (40bar)	29 MPa	31 MPa	32 MPa	34 MPa
Q_{S MIN} (0,01)	10 MPa	10 MPa	10 MPa	10 MPa
P_{QR} (30 MPa 23°C)	0,94	0,93	0,89	0,81
P_{QR} (30 MPa 150°C)	0,74	0,82	0,61	0,38
maintenance factor m	2,5	2,5	2,5	2,5
seating stress y	2800 psi	2800 psi	2800 psi	2800 psi

Note: The data can be found on Gasketdata.org

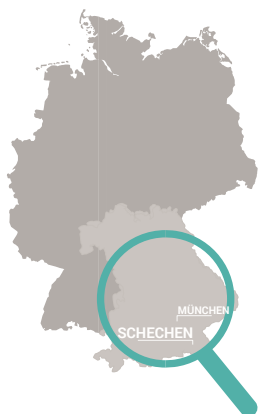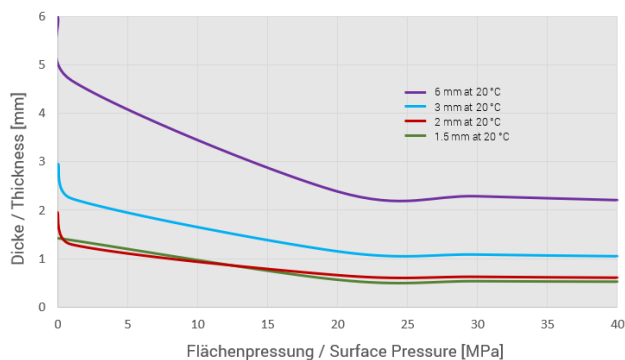

- ✓ Made in Germany
- ✓ International Presence
- ✓ Represented in over 50 countries

For detailed selection criteria, technical information, installation guideline and the relevant contact person, please visit our website: www.kwo-ptfe.de

KWO® Dichtungstechnik GmbH

Am Eschengrund 3
 83135 Schechen, Germany
 Tel: + 49 8039 90254-0
 Fax: + 49 8039 90254-299
 Email: info@kwo-ptfe.de



All technical information and advice given here is based on our previous experiences and/or test results. We give this information to the best of our knowledge, but assume no legal responsibility. Customers are asked to check the suitability and usability in the specific application, since the performance of the product can only be judged when all necessary operating data are available. Specifications are subject to change without notice. KWO's terms and conditions of sale apply to the purchase and sale of the product.